




## UL LISTED SPRINKLER HANGER

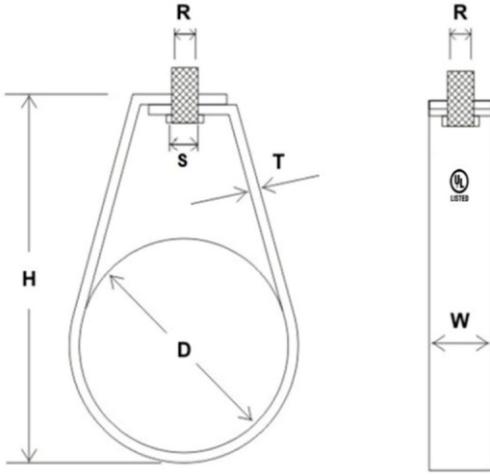

### FEATURES AND BENEFITS.

<b>Coating Specification:</b>	* Minimum 13+ micron Electro-galvanized zinc plating.
<b>Dimensional Tolerance :</b>	* All Dimensions are as per Table LSH-01 unless otherwise specified. * For dimensions not specified: $\pm 3\%$ .
<b>Material Specification:</b>	M.S (Mild steel) IS:513 / IS 1079 / IS 2062 / ASTM A36 / ASTM A1008 / ASTM A1011 M.S (Mild steel) IS:513 / IS 1079 / IS 2062 / ASTM A36 / ASTM A1008 / ASTM A1011.
<b>Assembly Specifications:</b>	* Can be Provided with our without Rubber Lining.

Table No LSH-01. Band Hanger Specification

Product Code.	Pipe Size Size Inch	Pipe Size Diameter (D) mm	Height (H) mm	Top Hole Diameter S (mm)	Hanger Rod. (R) mm	Surface Coating Thickness microns $\mu$	Maximum Load (N)
FG-LSH-07	3/4"	26.67	60.0	13.0	M10	13+	3336
FG-LSH-10	1"	33.40	69.0	13.0	M10	13+	3336
FG-LSH-12	1.1/4"	42.16	78.0	13.0	M10	13+	3336
FG-LSH-15	1.1/2"	48.26	85.0	13.0	M10	13+	3336
FG-LSH-20	2"	60.33	102.0	13.0	M10	13+	3336
FG-LSH-25	2.1/2"	73.03	118.0	13.0	M10	13+	3781
FG-LSH-30	3"	88.90	144.0	13.0	M10	13+	4670
FG-LSH-40	4"	114.30	178.0	13.0	M10	13+	6672
FG-LSH-50	5"	141.30	220.0	16.0	M12	13+	8896
FG-LSH-60	6"	168.28	262.0	16.0	M12	13+	11787
FG-LSH-80	8"	219.08	305.0	16.0	M12	13+	18014

**NOTE:-** 1. CAN BE PROVIDED WITH OR WITHOUT RUBBER.  
2. CAN BE PROVIDED WITH OR WITHOUT TOP NUT.

