




CLEVIS HANGER

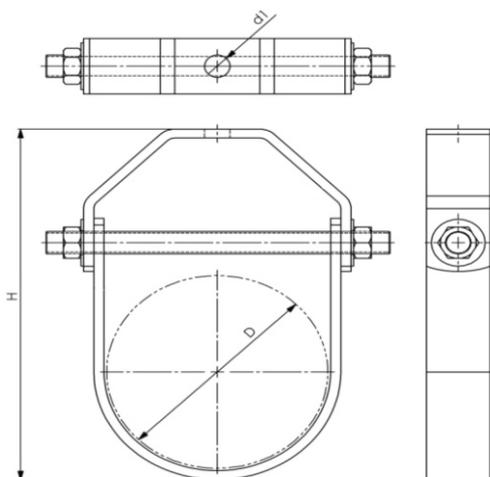

FEATURES AND BENEFITS.

Description:-	<ul style="list-style-type: none"> * Designed for chilled water pipe work and fire fighting systems. * Design permits vertical adjustment of pipe after installation. * Hanger load nut above clevis must be tightened securely to ensure proper hanger performance.
Material:-	Steel, other materials on request.
Special:-	<ul style="list-style-type: none"> * Electro galvanized as per ASTM B 633. * Galvanized as per ASTM A 123/ A123M. * Designed to meet MSS standard SP-58, type 1 and SP-69.

Product Code	Nominal Pipe Size In.	Pipe OD (D) mm	Height (H) mm	Top Hole Dia (d1) mm	Hanger Rod Size (mm)	Cross Bolt Dia. (CRD)	Max Load (N)	Box Quantity	
VTEPCH022	½"	DN15	21.3	80.0	11	M10	M8	4000	300
VTEPCH027	¾"	DN20	26.7	85.0	11	M10	M8	4000	300
VTEPCH034	1"	DN25	33.4	99.0	11	M10	M8	4000	250
VTEPCH042	1¼"	DN32	42.1	107.0	11	M10	M8	4000	150
VTEPCH048	1½"	DN40	48.2	109.0	11	M10	M8	4000	150
VTEPCH060	2"	DN50	60.3	128.0	11	M10	M8	4000	100
VTEPCH073	1½"	DN65	73	158.0	13	M12	M10	6500	60
VTEPCH090	3"	DN80	88.9	171.0	13	M12	M10	6500	40
VTEPCH101	1½"	DN90	101.6	179.0	13	M12	M10	6500	30
VTEPCH114	4"	DN100	114.3	204.0	13	M12	M10	8000	25
VTEPCH141	5"	DN125	141.3	235.0	17	M16	M12	8000	15
VTEPCH168	6"	DN150	168.3	265.0	17	M16	M12	11000	12
VTEPCH219	8"	DN200	219.1	333.0	17	M16	M12	11000	6
VTEPCH273	10"	DN250	273.1	390.0	21	M20	M16	15000	5
VTEPCH323	12"	DN300	323.8	465.0	21	M20	M16	15000	5
VTEPCH355	14"	DN350	355.6	525.0	21	M20	M20	17500	3
VTEPCH406	16"	DN400	406.4	575.0	25	M24	M24	17500	2
VTEPCH457	18"	DN450	457.2	650.0	25	M24	M24	17500	2
VTEPCH508	20"	DN500	508	705.0	32	M30	M24	22000	1
VTEPCH610	24"	DN600	609.6	815.0	32	M30	M24	27000	1
VTEPCH762	30"	DN750	762	1000.0	32	M30	M24	30000	1

- NOTE:-**
1. THE CROSS BOLT AND HANGER ROD SIZE CAN BE CHANGED UPON REQUEST.
 2. THE SIZES OF CLEVIS HANGER ABOVE 8" WILL BE PROVIDED IN HDPE BAGS
 3. a. EP - MICRONS : 8µ - 15µ
b. HDG - MICRONS : 70µ - 95µWE

