




SPRINKLER / LOOP HANGER WITH RUBBER LINING

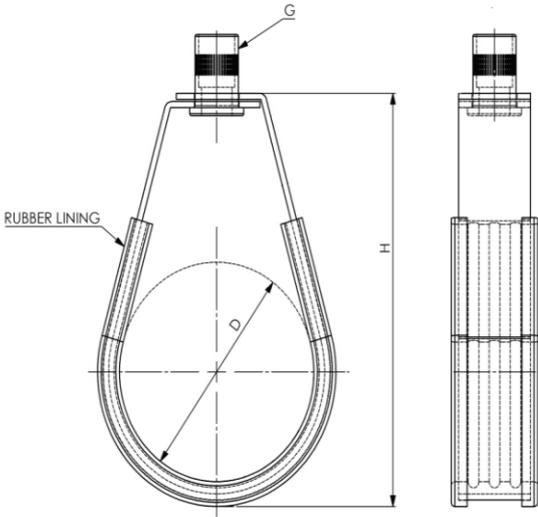

FEATURES AND BENEFITS.

- | | |
|----------------------|--|
| Description:- | <ul style="list-style-type: none"> * For use in fire fighting and sprinkler installations. * Easy to install and adjust, without tools. * High load capacity due to one piece design. * Knurled swivel nut to adjust vertical pipe alignment during and after installations. |
| Material:- | Mild steel, other materials on request. |
| Special:- | <ul style="list-style-type: none"> * Electro galvanized as per ASTM B 633. * Noise reduction up to 188 dB (A). * Temperature resistance from -20°C to +100°C. * Designed to meet MSS Standard SP 58 type 10 and SP 69. |

Product Code	Nominal Pipe Size Inches.	Pipe OD (D) mm	Height (H) mm	Hanger Rod (G) inches	mm	Max Load Microns (N)	μ	Box Quantity.	
VTEPSHR027	¾"	DN20	26.7	61	3/8"	M10	3000	8 -15	350
VTEPSHR034	1"	DN25	33.4	70	3/8"	M10	3000	8 -15	300
VTEPSHR042	1¼"	DN32	42.1	78	3/8"	M10	3000	8 -15	250
VTEPSHR048	1½"	DN40	48.2	84	3/8"	M10	3000	8 -15	200
VTEPSHR060	2"	DN50	60.3	102	3/8"	M10	3000	8 -15	150
VTEPSHR073	1½"	DN65	73	118	3/8"	M10	4500	8 -15	125
VTEPSHR090	3"	DN80	88.9	144	3/8"	M10	4500	8 -15	80
VTEPSHR114	4"	DN100	114.3	176	3/8"	M10	5500	8 -15	60
VTEPSHR141	5"	DN125	141.3	220	1/2"	M12	6500	8 -15	40
VTEPSHR168	6"	DN150	168.3	262	1/2"	M12	7500	8 -15	25
VTEPSHR219	8"	DN200	219.1	305	1/2"	M12	9000	8 -15	12
VTEPSHR273	10"	DN250	273	320	1/2"	M12	9000	8 -15	5

NOTE:- 1. CUSTOMIZED DIMENSIONS AVAILABLE ON REQUEST.

