




## TWO BOLT CLAMP WITH RUBBER LINING

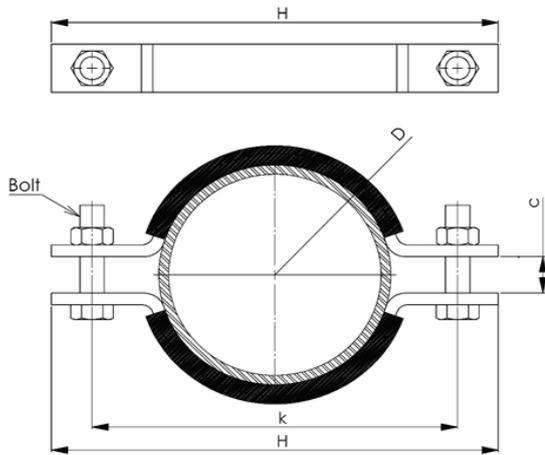

### FEATURES AND BENEFITS.

<b>Description:-</b>	<ul style="list-style-type: none"> <li>* Designed to act as a horizontal support for heavier pipes.</li> <li>* Two bolt arrangement provides sturdier support.</li> </ul>
<b>Material:-</b>	Steel, other materials on request.
<b>Special:-</b>	<ul style="list-style-type: none"> <li>* Electro galvanized as per ASTM B 633.</li> <li>* Designed to meet MSS Standard SP-58-2002, type 8 and SP-69.</li> <li>* Temperature resistance from -20 °C to +110 °C.</li> <li>* Noise insulating lining, EPDM, black.</li> <li>* Noise reduction up to 18dB (A).</li> </ul>

Product Code	Nominal Pipe Size		Pipe OD Total length		Length Between Bolts (k) mm	Gap (C)mm	Bolt Size mm	Max Load	Box Quantity
	In.	mm	(D) mm	(H) mm					
VTEPTBC022	½"	DN15	21.3	97	68	12	M10	1700	50
VTEPTBC027	¾"	DN20	26.7	105	76	12	M10	1700	50
VTEPTBC034	1"	DN25	33.4	113	84	12	M10	1700	50
VTEPTBC042	1 ¼"	DN32	42.1	121	92	12	M10	1700	50
VTEPTBC048	1 ½"	DN40	48.2	127	98	12	M10	1700	50
VTEPTBC060	2"	DN50	60.3	156	116	16	M10	1700	40
VTEPTBC073	2 ½"	DN65	73	182	142	16	M12	4000	40
VTEPTBC090	3"	DN80	88.9	196	156	16	M12	4000	30
VTEPTBC101	3 ½"	DN90	101	208	168	16	M12	4000	30
VTEPTBC114	4"	DN100	114.3	220	180	19	M12	4000	20
VTEPTBC141	5"	DN125	141.3	252	214	19	M16	6000	15
VTEPTBC168	6"	DN150	168.3	290	242	22	M16	6000	10
VTEPTBC219	8"	DN200	219.1	352	302	25	M16	11000	5
VTEPTBC273	10"	DN250	273.1	406	358	25	M16	12000	1
VTEPTBC323	12"	DN300	323.8	490	430	25	M20	15000	1
VTEPTBC355	14"	DN350	355.6	546	480	28	M20	15000	1
VTEPTBC406	16"	DN400	406.4	597	532	28	M20	22000	1
VTEPTBC457	18"	DN450	457.2	686	610	32	M20	20000	1
VTEPTBC508	20"	DN500	508	776	680	35	M20	22000	1
VTEPTBC610	24"	DN600	609.6	876	780	42	M20	22000	1

NOTE:- 1. CUSTOMIZED DIMENSIONS AVAILABLE ON REQUEST.

