




## U STRAP WITH RUBBER LINING.

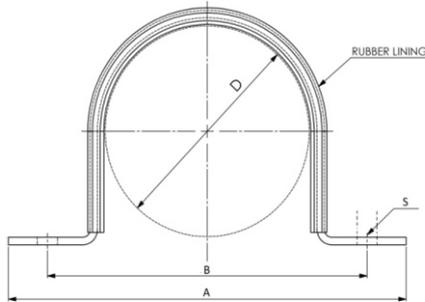

### FEATURES AND BENEFITS.

<b>Description:-</b>	<ul style="list-style-type: none"> <li>* For mounting plain or insulated pipes.</li> <li>* Can be used with Rubber Support Inserts.</li> <li>* Slotted hole same as used u strap.</li> </ul>
<b>Material:-</b>	Steel, other materials on request.
<b>Special:-</b>	<ul style="list-style-type: none"> <li>* Electro galvanized as per ASTM B 633.</li> <li>* Galvanized as per ASTM A 123 / A 123M.</li> <li>* Temperature resistance from -20 °C to +110 °C.</li> <li>* Noise reduction up to 18 dB (A).</li> <li>* Designed to meet MSS Standard SP-58, type 26 and SP-69.</li> </ul>

Product Code	Nominal Pipe Size In.	Pipe OD (D) mm	Overall Dimension (A) mm	Distance Between Two Bolt (B) mm	Hole Size (S) mm	Max Load (N)	Box Quantity	
VTEPUSR022	½"	DN15	21.3	78	54	M11	4000	500
VTEPUSR027	¾"	DN20	26.7	83	59	M11	4000	400
VTEPUSR034	1"	DN25	33.4	90	66	M11	4000	400
VTEPUSR042	1 ¼"	DN32	42.1	99	75	M11	4000	350
VTEPUSR048	1 ½"	DN40	48.2	104	80	M11	5000	300
VTEPUSR054	-	54	112	87	M11	5000	250	
VTEPUSR060	2"	DN50	60.3	118	93	M11	5000	200
VTEPUSR073	2 ½"	DN65	73	131	106	M11	6000	150
VTEPUSR090	3"	DN80	88.9	151	126	M11	6000	150
VTEPUSR101	3 ½"	DN90	101.6	163	138	M11	6000	150
VTEPUSR110	-	110	172	147	M11	6000	125	
VTEPUSR114	4"	DN100	114.3	176	151	M11	6000	125
VTEPUSR141	5"	DN125	141.3	203	178	M11	6000	100
VTEPUSR155	-	160	222	197	M11	6000	100	
VTEPUSR168	6"	DN150	168.3	240	210	M13	8000	100
VTEPUSR219	8"	DN200	219.1	291	261	M13	8000	50
VTEPUSR273	10"	DN250	273	369	329	M13	12500	30
VTEPUSR323	12"	DN300	323.8	420	380	M13	12500	30
VTEPUSR356	14"	DN350	355.6	456	416	M17	18000	10
VTEPUSR406	16"	DN400	406.4	506	466	M17	18000	10
VTEPUSR457	18"	DN450	457.2	581	531	M21	18000	5
VTEPUSR508	20"	DN500	508.2	632	582	M21	18000	5
VTEPUSR610	24"	DN600	609.6	734	684	M21	18000	5

**NOTE:-** 1. OTHER DIMENSIONS AVAILABLE ON REQUEST.  
 2. a. EP - MICRONS : 8µ - 15µ  
 b. HDG - MICRONS : 70µ - 95µ

