




SLIDING PIPE SUPPORT

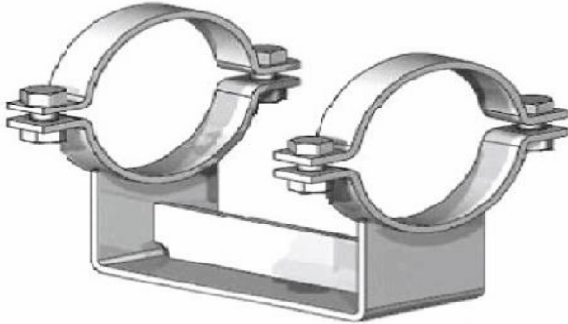

FEATURES AND BENEFITS.

Material:-	Mild Steel, other material on request
Special:-	* Galvanized ASTM A 123 / A 123M * Temperature resistance up to 300 °C

Product Code	Nominal Pipe Size		PIPE OD (mm)	Insulation Thickness (mm)	Outside Diameter (mm)	Width (mm)	Thickness (mm)	Height (mm)	Length of Guide (mm)	Hole Diameter (mm)	Max Load (N)
	In.	mm									
VTEPSPS219	8"	DN200	219.1	-	219.1	50	8	107	290	M16	29000
VTEP32SPS219	----	DN200	-	32 MM	283.1	50	8	107	290	M16	29000
VTEP50SPS219	--	DN200	-	50 MM	319.1	50	8	142	290	M16	29000
VTEPSPS250	10"	DN250	273.1	-	273.1	50	8	107	290	M16	29000
VTEP32SPS273	----	DN250	-	32 MM	337.1	50	8	107	290	M16	29000
VTEP50SPS273	--	DN250	-	50 MM	373.1	50	8	142	290	M16	29000
VTEPSPS324	12"	DN300	323.8	-	323.8	50	8	107	290	M16	29000
VTEP32SPS324	----	DN300	-	32 MM	387.8	60	8	107	290	M16	34000
VTEP50SPS324	--	DN300	-	50 MM	423.8	60	8	142	290	M16	34000
VTEPSPS356	14"	DN350	355.6	-	355.6	60	8	142	290	M16	34000
VTEP32SPS356	----	DN350	-	32 MM	419.6	60	8	142	290	M16	34000
VTEP50SPS356	--	DN350	-	50 MM	455.6	60	8	192	290	M16	34000
VTEPSPS406	16"	DN400	406.4	-	406.4	60	8	142	290	M16	34000
VTEP32SPS406	----	DN400	-	32 MM	470.4	60	8	142	290	M16	34000
VTEP50SPS406	--	DN400	-	50 MM	506.4	60	8	192	290	M16	34000
VTEPSPS457	18"	DN450	457.2	-	457.2	60	8	142	290	M16	34000
VTEP32SPS457	----	DN450	-	32 MM	521.2	75	10	142	290	M16	44000
VTEP50SPS457	--	DN450	-	50 MM	557.2	75	10	192	290	M16	44000
VTEPSPS508	20"	DN500	508	-	508	75	10	142	290	M16	44000
VTEP32SPS508	----	DN500	-	32 MM	572	75	10	142	290	M16	44000
VTEP50SPS508	--	DN500	-	50 MM	608	75	10	192	290	M16	44000
VTEPSPS610	24"	DN600	609.6	-	609.6	75	10	142	290	M16	44000
VTEP32SPS610	----	DN600	-	32 MM	673.6	75	10	142	290	M16	44000
VTEP50SPS610	---	DN600	-	50 MM	709.6	75	10	192	290	M16	44000

- NOTE:-**
1. OTHER DIMENSIONS AVAILABLE ON REQUEST.
 2. a. EP - MICRONS : 8μ - 15μ
b. HDG - MICRONS : 70μ - 95μ

