




CLOSE SPRING MOUNT

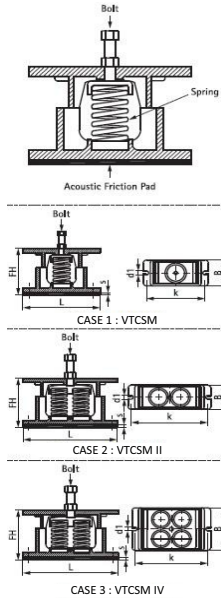

FEATURES AND BENEFITS.

- Description:-**
- * Closed Spring Mount design provides horizontal stability, high loading capacity and protective spring enclosure.
 - * All mounts have external levelling arrangement, capable of compensating or full static deflection.
 - * Inner walls of lower casting have resilient rubbers
 - * Deflection is at rated load with 15% tolerance.
 - * All mounts have approximately 50% overload capacity.
 - * Mountings must be adjusted so that upper housing clear slower housing by at least 6 mm and not more than 12 mm.
 - * Application examples include : Chiller, AHU's, pumps, centrifugal / axial fans' condensing units, roof top packaged units, reciprocating compressors, DG sets, punch presses, drop hammers, and floor pipe supports (normally at first few pipe support points leading from isolated equipment.)
- Special:-**
- * Springs powder coated.
 - * Designed to meet BS1726, class B.

Product Code	Colour Code	Bolt	L mm	B mm	s mm	R mm	k mm	FH mm	Deflection mm	Max Load (N)
VTCSM 60	Yellow	M12	160	92	5	M10	147	116	25	600
VTCSM 100	Black	M12	160	92	5	M10	147	116	25	1000
VTCSM 160	White	M12	160	92	5	M10	147	116	25	1600
VTCSM 200	Green	M12	160	92	5	M10	147	116	25	2000
VTCSM 250	Blue	M12	160	92	5	M10	147	116	25	2500
VTCSM 300	Red	M16	200	115	10	M12	180	158	25	3000
VTCSM 400	Purple	M16	200	115	10	M12	180	158	25	4000
VTCSM 500	Grey	M16	200	115	5	M12	147	116	25	5000
VTCSM 600	Green	M16	200	115	10	M12	180	158	25	6000
VTCSM 800	Blue	M16	200	115	10	M12	180	158	25	8000
VTCSM 1050	Yellow	M16	200	115	10	M12	180	158	25	10500
VTCSM 1250	Black	M16	200	115	10	M12	180	158	25	12500
VTCSM II/600	Red	M20	285	115	10	M16	265	163	25	6000
VTCSM II/800	Purple	M20	285	115	10	M16	265	163	25	8000
VTCSM II/1000	Grey	M20	285	115	10	M16	265	163	25	10000
VTCSM II/1200	Green	M20	285	115	10	M16	265	163	25	12000
VTCSM II/1600	Blue	M20	285	115	10	M16	265	163	25	16000
VTCSM II/2100	Yellow	M20	285	115	10	M16	265	163	25	21000
VTCSM II/2500	Black	M20	285	115	10	M16	265	163	25	25000
VTCSM IV/1200	Red	M20	285	210	10	M16	265	163	25	12000
VTCSM IV/1600	Purple	M20	285	210	10	M16	265	163	25	16000
VTCSM IV/2000	Grey	M20	285	210	10	M16	265	163	25	20000
VTCSM IV/2400	Green	M20	285	210	10	M16	265	163	25	24000
VTCSM IV/3200	Blue	M20	285	210	10	M16	265	163	25	32000
VTCSM IV/4200	Yellow	M20	285	210	10	M16	265	163	25	42000
VTCSM IV/5000	Black	M20	285	210	10	M16	265	163	25	50000

- NOTE:-**
1. DUE TO POLICY OF CONTINUAL IMPROVEMENT, THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.
 2. MEASUREMENT ARE SUBJECT TO 5% TOLERANCE.
 3. TO ACHIEVE GOOD SOUND SUPPRESSIONS DO NOT LOAD FITTING.

