




## U BOLT

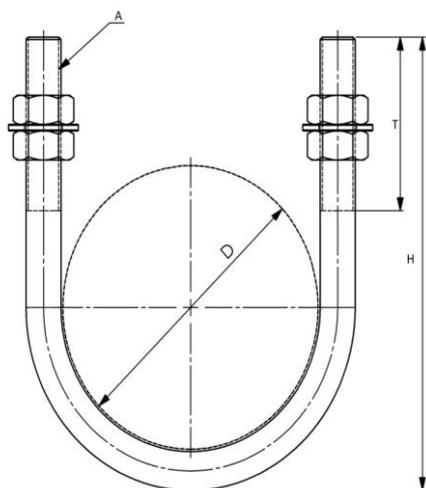

### FEATURES AND BENEFITS.

<b>Description:-</b>	<ul style="list-style-type: none"> <li>* High load capacity due to one piece design.</li> <li>* Special U bolts with longer tangents and threads available on request.</li> </ul>
<b>Material:-</b>	Steel, other materials on request.
<b>Special:-</b>	<ul style="list-style-type: none"> <li>* Electro galvanized as per ASTM B 633.</li> <li>* Galvanized as per ASTM A 123 / A 123M.</li> <li>* Designed to meet MSS Standard SP-58, type 24 and SP-69.</li> </ul>

Product Code	Nominal Pipe Size In.	Nominal Pipe Size mm	Pipe OD (D) mm	Rod Size (A) mm	Height (H) mm	Thread Length (T) mm	Max Load (N)	Box Quantity
VTEPUB022	½"	DN15	21.3	M10	65	50	6000	400
VTEPUB027	¾"	DN20	26.7	M10	77	50	6000	350
VTEPUB034	1"	DN25	33.4	M10	85	50	6000	300
VTEPUB042	1¼"	DN32	42.1	M10	93	50	6000	250
VTEPUB048	1½"	DN40	48.2	M10	100	50	6000	225
VTEPUB060	2"	DN50	60.3	M10	110	50	6000	200
VTEPUB073	1½"	DN65	73	M12	127	50	10000	150
VTEPUB090	3"	DN80	88.9	M12	140	50	10000	100
VTEPUB114	4"	DN100	114.3	M12	165	50	10000	80
VTEPUB141	5"	DN125	141.3	M12	190	50	10000	70
VTEPUB168	6"	DN150	168.3	M12	220	50	10000	60
VTEPUB219	8"	DN200	219.1	M16	295	75	20000	40
VTEPUB273	10"	DN250	273	M20	370	100	32500	20
VTEPUB323	12"	DN300	323.8	M20	420	100	32500	20
VTEPUB356	14"	DN350	355.6	M20	455	100	32500	5
VTEPUB406	16"	DN400	406.4	M20	505	100	32500	5
VTEPUB457	18"	DN450	457.2	M24	555	100	45000	5
VTEPUB508	20"	DN500	508.2	M24	605	100	45000	5
VTEPUB610	24"	DN600	609.6	M24	710	100	45000	5

- NOTE:-**
1. SIZES OF THE U BOLTS CAN BE MODIFIED TO BE USED WITH RUBBER SUPPORT INSERTS
  2. ALTERNATE ROD SIZES FOR DIFFERENT PIPE SIZES AVAILABLE ON REQUEST.
  3. a. EP - MICRONS : 8μ - 15μ  
b. HDG - MICRONS : 70μ - 95μ

