


## UL LISTED CLEVIS HANGER

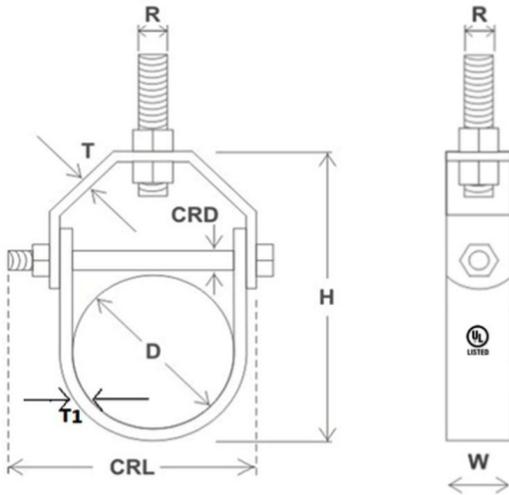

### FEATURES AND BENEFITS.

<b>Coating Specification:</b>	* Minimum 13+ micron Electro-galvanized zinc plating.
<b>Dimensional Tolerance :</b>	* All Dimensions are as per Table LCH-01 unless otherwise specified. * For dimensions not specified: $\pm 3\%$ .
<b>Material Specification:</b>	M.S (Mild steel) IS:513 / IS 1079 / IS 2062 / ASTM A36 / ASTM A1008 / ASTM A1011 and all equivalent ASTM and EN specifications
<b>Assembly Specifications:</b>	* Can be Provided with our without Rubber Lining.

Table No LCH-01. Clevis Hanger Specification

Product Code	Pipe Size		Height (H) mm	Hanger Rod (R )	Top Hole Dia (d1) mm $\pm 0.5$ mm	BOLT CRD (mm) X CRL (mm) length $\pm 10.0$ mm	Surface Coating Specifications	Maximum Load (N)
	Size	Diameter (D)					microns $\mu$	
	Inch	mm						
FG-LCH-07	3/4"	26.67	88.0	M10	11.0	M8 X 55 mm	13+	3336
FG-LCH-10	1"	33.40	99.0	M10	11.0	M8 X 60 mm	13+	3336
FG-LCH-12	1.1/4"	42.16	109.0	M10	11.0	M8 X 70 mm	13+	3336
FG-LCH-15	1.1/2"	48.26	109.0	M10	11.0	M8 X 75 mm	13+	3336
FG-LCH-20	2"	60.33	130.0	M10	11.0	M8 X 90 mm	13+	3336
FG-LCH-25	2.1/2"	73.03	158.0	M12	13.0	M10 X 110 mm	13+	3781
FG-LCH-30	3"	88.90	172.0	M12	13.0	M10 X 125 mm	13+	4670
FG-LCH-40	4"	114.30	204.0	M12	13.0	M10 X 150 mm	13+	6672
FG-LCH-60	6"	168.28	264.0	M16	17.0	M12 X 215 mm	13+	11787
FG-LCH-80	8"	219.08	333.0	M16	17.0	M12 X 280 mm	13+	18014
FG-LCH-100	10"	273.05	388.0	M20	21.0	M16 X 410 mm	13+	26020
FG-LCH-120	12"	323.85	450.0	M20	21.0	M16 X 460 mm	13+	35139

**NOTE:-** 1. CAN BE PROVIDED WITH OR WITHOUT RUBBER.  
2. CAN BE PROVIDED WITH OR WITHOUT TOP NUT.