




## RISER HANGER RUBBER LINING

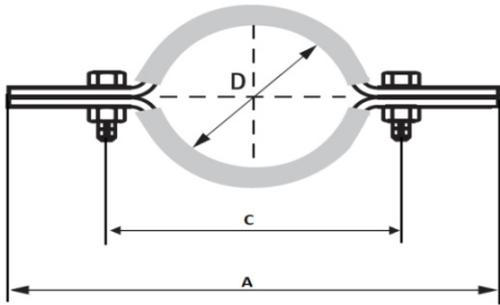

### FEATURES AND BENEFITS.

<b>Description:-</b>	<ul style="list-style-type: none"> <li>* Designed to act as a rigid support or guide for vertical pipes.</li> <li>* Suitable for use with all types of pipes.</li> </ul>
<b>Material:-</b>	Steel, other materials on request.
<b>Special:-</b>	<ul style="list-style-type: none"> <li>* Electro galvanized as per ASTM B 633.</li> <li>* Designed to meet MSS Standard SP-58-2002, type 8 and SP-69.</li> <li>* Temperature resistance from -20 °C to +110 °C</li> <li>* Noise insulating lining, EPDM, black.</li> <li>* Noise reduction up to 18dB (A).</li> </ul>

Product Code	Nominal Pipe Size		Pipe OD (D) mm	Total length (A) mm	Length Between Bolts (C)mm	Hole Size mm	Max Load (N)	Microns (μ)	Box Quantity
	In.	mm							
VTEPRHR022	½"	DN15	21.3	216	59	11	4000	8-15	50
VTEPRHR027	¾"	DN20	26.7	227	68	11	4000	8-15	50
VTEPRHR034	1"	DN25	33.4	227	71	11	4000	8-15	50
VTEPRHR042	1 ¼"	DN32	42.1	240	83	11	4000	8-15	50
VTEPRHR048	1 ½"	DN40	48.2	251	96	11	4000	8-15	50
VTEPRHR060	2"	DN50	60.3	260	106	11	4000	8-15	40
VTEPRHR073	2 ½"	DN65	73	280	124	11	6500	8-15	40
VTEPRHR090	3"	DN80	88.9	298	140	11	6500	8-15	30
VTEPRHR114	4"	DN100	114.3	321	165	13	8000	8-15	20
VTEPRHR141	5"	DN125	141.3	330	168	13	8000	8-15	15
VTEPRHR168	6"	DN150	168.3	368	210	13	11000	8-15	10
VTEPRHR219	8"	DN200	219.1	406	244	17	11000	8-15	5
VTEPRHR273	10"	DN250	273.1	464	311	17	15000	8-15	1
VTEPRHR323	12"	DN300	323.8	524	371	17	15000	8-15	1
VTEPRHR355	14"	DN350	355.6	581	435	17	17500	8-15	1
VTEPRHR406	16"	DN400	406.4	622	464	17	17500	8-15	1
VTEPRHR457	18"	DN450	457.2	686	533	21	17500	8-15	1
VTEPRHR508	20"	DN500	508	750	600	21	22000	8-15	1
VTEPRHR610	24"	DN600	609.6	850	700	21	27000	8-15	1

**NOTE:-** 1. CUSTOMIZED DIMENSIONS AVAILABLE ON REQUEST.

